



# PAS-2620ES

## BEST-IN-CLASS

### PRO ATTACHMENT SERIES




5 Year domestic warranty/2 year commercial warranty not available in all markets.  
Check with your dealer for details.  
For your safety, use appropriate protective gear in the working environment.

**ECHO**®

**DEPEND ON IT**

# FEATURES & BENEFITS

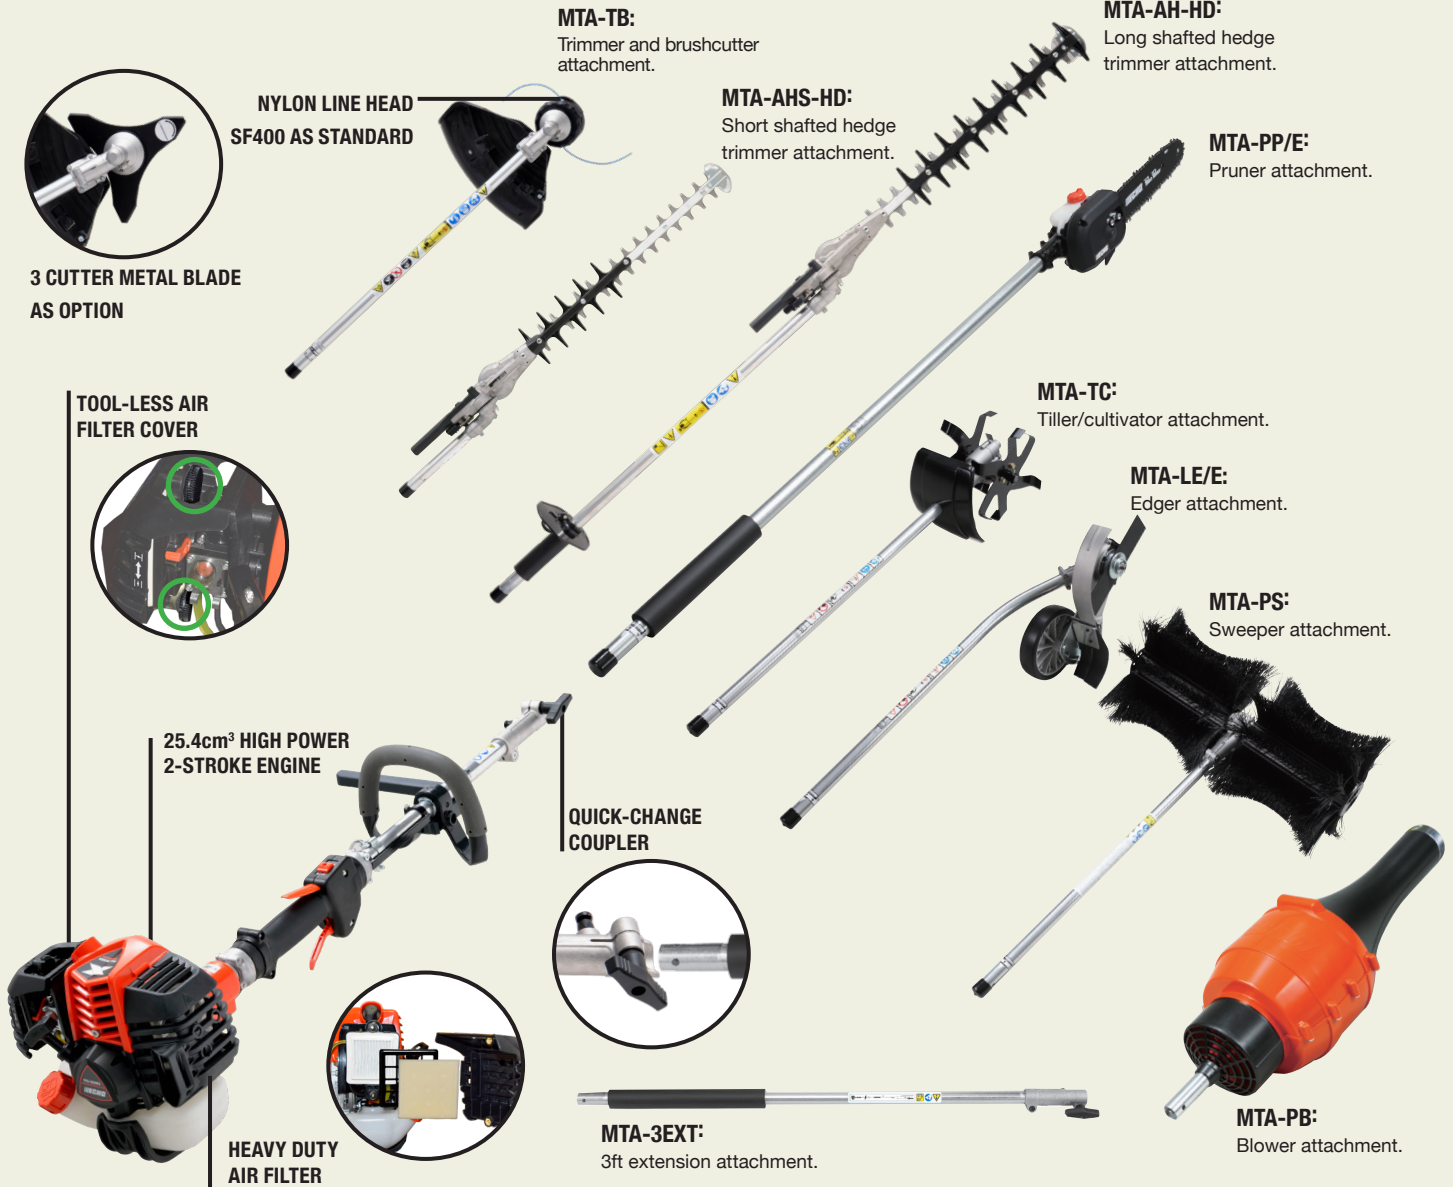

Engine Displacement (cm <sup>3</sup> )	Dry Weight* <sup>1</sup> (kg)	Output (kW/ps)	Fuel Tank Capacity (L)	Length* <sup>1</sup> (mm)
25.4	4.8	1.0 / 1.4	0.6	1038

\*1: Unit without attachment.

## < LIGHTWEIGHT AND POWERFUL ENGINE FOR PROFESSIONAL USE >

// 25.4 cm<sup>3</sup> professional-grade, 2 stroke engine provides power and high durability.

// ES-start for reduced effort starting.

// Tool-less air filter cover for easy access.

// Commercial-grade felt air filter for proved filtration.

// Purge bulb for easy starting.

## < WIDE RANGE OF ATTACHMENTS >

// 9 types of attachments for wider range of use.

## < EASE OF USE >

// Throttle handle with rubber grip for increased comfort and better control.

// Quick-change coupler makes attachment transition quick and easy.



Specifications, descriptions, and illustrative materials in this literature are as accurate as known at the time of publication, but are subject to change without notice.

# FEATURES & BENEFITS

## ATTACHMENT SPECIFICATIONS

	Trimmer/ Brushcutter	Hedge Trimmer		Power Pruner®	Tiller Cultivator	Edger	ProSweep™	Blower	Extension
	MTA-TB	MTA-AHS-HD	MTA-AH-HD	MTA-PP/E	MTA-TC	MTA-LE/E	MTA-PS	MTA-PB	MTA-3EXT
Dry weight (kg)	1.0* <sup>2</sup>	2.1	2.6	1.8* <sup>3</sup>	2.3	2.2* <sup>5</sup>	5.3	1.8	1.2
Length (mm)	816* <sup>2</sup>	962	1637	1451* <sup>4</sup>	907	787* <sup>5</sup>	955	635	995
Drive shaft diameter (mm)	6.1	6.1	6.1	6.1	6.1	6.1	6.1	10.5	6.1
Main pipe diameter (mm)	25	25	25	25	25	25	25	25	25
Gear reduction ratio	1.36	4.6	4.6	1.5	42.75	2.07	42.75	-	-
Cutting length (mm)	-	536	536	-	-	-	-	-	-
Cutter pitch (mm)	-	35	35	-	-	-	-	-	-
Applicable bar length (cm / inch)	-	-	-	25 / 10	-	-	-	-	-
Saw chain pitch (inch)	-	-	-	3/8	-	-	-	-	-
Cutting blade length (mm)	-	-	-	-	-	197	-	-	-
Culti rotor diameter (mm)	-	-	-	-	220	-	-	-	-
Culti rotor width (mm)	-	-	-	-	160	-	-	-	-
Maximum sweeping width (mm)	-	-	-	-	-	-	590	-	-
Air volume* <sup>1</sup> (m <sup>3</sup> /h)	-	-	-	-	-	-	-	651	-
Maximum air speed* <sup>1</sup> (m/sec)	-	-	-	-	-	-	-	63.5	-

\*1: With PAS-2620ES power head. \*2: Without cutting attachment and shield. \*3: Without guide bar and saw chain. \*4: With standard 25 cm guide bar and saw chain. \*5: Without blade.

Specifications, descriptions, and illustrative materials in this literature are as accurate as known at the time of publication, but are subject to change without notice.

YNPN-17-1103E

  
**DEPEND ON IT**